
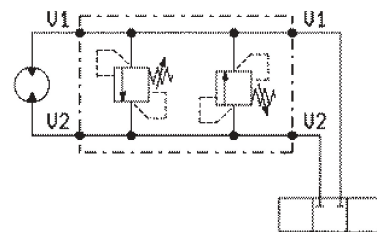


VSD-DI


05.15.01 - X - Y - Z

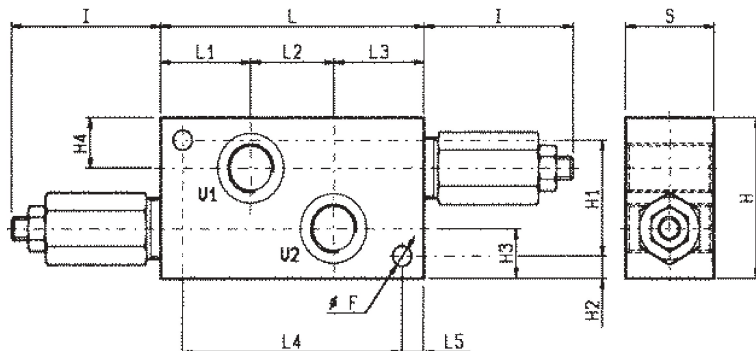


DATI TECNICI / TECHNICAL DATA

Pressione di lavoro max. 350 bar
Max. working pressure 350 bar

Portata massima vedi diagramma
Flow see performance graph

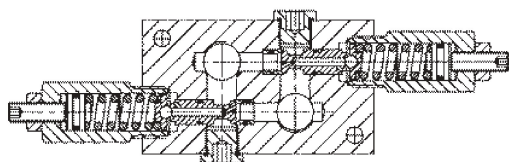

50	10	130	54.5	41	54.5	150	80	30.5	30.5	9.5	70	89	10.5		1	2
40	10	100	41	38	41	120	70	21.5	21.5	9.5	50	69	8.5		1/2	1.32
40	10	100	41	38	41	120	70	21.5	21.5	9.5	50	69	8.5		3/8	1.32
S	L5	L4	L3	L2	L1	L	I	H4	H3	H2	H1	H	F		Y	Peso kg Weight kg

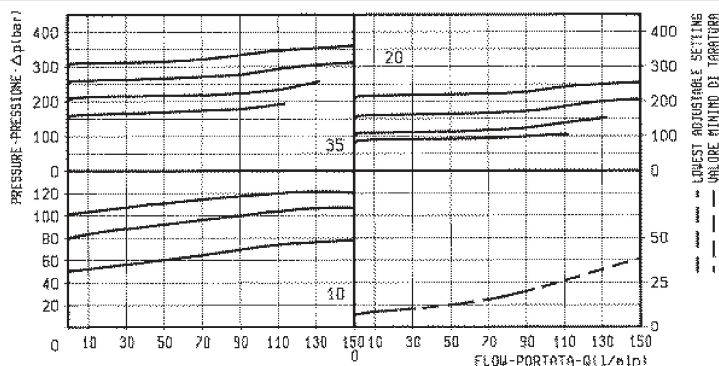

X

**REGOLAZIONI
ADJUSTMENTS**

03

vite esterna
esagono incassato
leakproof hex.
socket screw



cappello per piombatura
sealing cap
codice / ordering code
03.05.01.001



MOLLE / SPRINGS

Z	Campo taratura min - max bar Adj. press. range bar	Incremento press. bar / giro vite Press. increase bar / turn	Taratura standard bar (Q = 5 l/min) Std. setting bar (made at 5 l/min)	Cod. ordinazione Ordering code	Colore Colour
10	40-100	33	100	03.51.01.151	blu blue
20	70-210	68	200	03.51.01.152	verde green
35	130-350	105	350	03.51.01.142	giallo yellow

Y

ATTACCHI / PORT SIZE

V1-V2

03

G 1/2

04

G 3/4

05

G 1