


HYDRAULIC MOTOR-BRAKE B/MR




APPLICATION

- » Conveyors
- » Feeding mechanism of robots and manipulators
- » Metal working machines
- » Textile machines
- » Agricultural machines
- » Food industries
- » Grass cutting machinery etc.

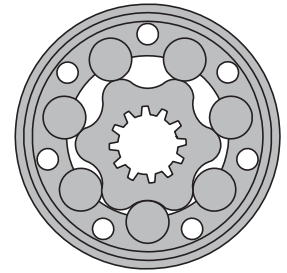

CONTENTS

Specification data	22
Dimensions and mounting	23+24
Shaft extensions	25
Permissible shaft loads	26
Order code	27

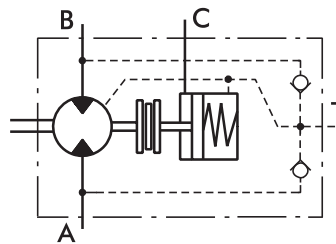

OPTIONS

- » Model - Spool valve, roll-gerotor
- » Fully integrated friction disk brake
- » Side port
- » Shafts - straight, tapered, splined
- » BSPP ports
- » Needle bearings
- » Flanges SAE-A, magento 4 bolts.


GENERAL

		Min.		Max.	
Displacement,	cm ³ /rev [in ³ /rev]	80,3 [4.90]		199,8 [12.19]	
Speed,	[RPM]	cont.: 500	int.: 600	cont.: 300	int.: 375
Torque,	daNm [lb-in]	cont.: 19,5 [1725]	int.: 22 [1947]	cont.: 45 [3980]	int.: 50 [4425]
Output,	kW [HP]	cont.: 8,4 [11.2]	int.: 9,6 [12.9]	cont.: 11 [14.8]	int.: 13 [17.4]
Pressure Drop,	bar [PSI]	cont.: 175 [2540]	int.: 200 [2900]	cont.: 175 [2540]	int.: 200 [2900]
Oil Flow,	lpm [GPM]	cont.: 40 [10.5]	int.: 48 [12.7]	cont.: 60 [15.9]	int.: 75 [19.8]
Min. Speed,	[RPM]	10			
Permissible Shaft Loads,	daNm [lb-in]	P _a =200 [450]			
Pressure fluid		Mineral based- HLP(DIN 51524) or HM(ISO 6743/4)			
Temperature range,	°C [°F]	-40÷140 [-40÷284]			
Optimal Viscosity range,	mm ² /s [SUS]	20÷75 [98÷347]			
Filtration		ISO code 18/16/13		According to ISO 4406 - 1999	

Oil flow in drain line

Pressure drop bar [PSI]	Viscosity mm ² /s [SUS]	Oil flow in drain line lpm [GPM]
100 [1450]	20 [98]	2,5 [.660]
	35 [164]	1,8 [.476]
140 [2030]	20 [98]	3,5 [.925]
	35 [164]	2,8 [.740]

Pressure Losses

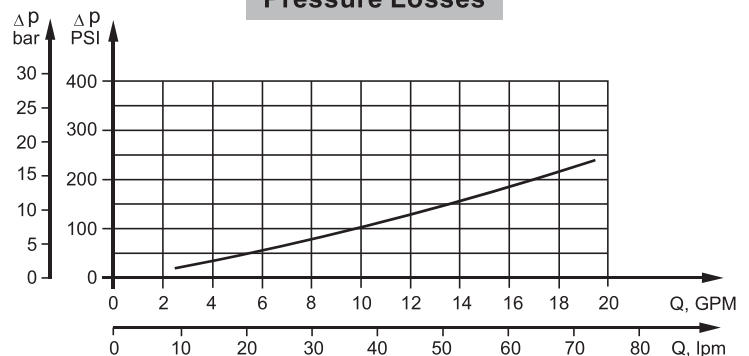

SPECIFICATION DATA

Type		B/MR 80	B/MR 100	B/MR 125	B/MR 160	B/MR 160 CB	B/MR 200	B/MR 200 CB
Displacement, cm³/rev [in³/rev]		80,3	99,8	125,7	159,6		199,8	
		[4.90]	[6.09]	[7.67]	[9.74]		[12.19]	
Max. Speed, [RPM]	Cont.	500	500	475	375		300	
	Int.*	600	600	600	470		375	
Max. Torque, daNm [lb-in]	Cont.	19,5 [1725]	24 [2125]	30 [2655]	30 [2655]	39 [3450]	30 [2655]	45 [3980]
	Int.*	22 [1947]	28 [2480]	34 [3010]	39 [3450]	43 [3805]	39 [3450]	50 [4425]
	Peak**	27 [2390]	32 [2832]	37 [3275]	46 [4070]	46 [4070]	56 [4955]	56 [4955]
Max. Output, kW [HP]	Cont.	8,4 [11.2]	10,8 [14.5]	12,5 [16.8]	10 [13.4]	11,5 [15.4]	7,8 [10.5]	11 [14.8]
	Int.*	9,6 [12.9]	12 [16.1]	14,5 [19.5]	12,5 [16.8]	14 [18.8]	12,4 [16.6]	13 [17.4]
Max. Pressure Drop, bar [PSI]	Cont.	175 [2540]	175 [2540]	175 [2540]	135 [1960]	175 [2540]	115 [1668]	175 [2540]
	Int.*	200 [2900]	200 [2900]	200 [2900]	175 [2540]	200 [2900]	150 [2175]	200 [2900]
	Peak**	225 [3263]	225 [3263]	225 [3263]	225 [3263]	225 [3263]	225 [3263]	225 [3263]
Max. Oil Flow, lpm [GPM]	Cont.	40 [10.5]	50 [13.2]	60 [15.9]				
	Int.*	48 [12.7]	60 [15.9]	75 [19.8]				
Max. Inlet Pressure, bar [PSI]	Cont.	175 [2540]						
	Int.*	200 [2900]						
	Peak**	225 [3263]						
Max. Starting Pressure, bar [PSI]		10 [145]	10 [145]	9 [130]	7 [102]		5 [73]	
Min. Starting Torque, daNm [lb-in]	At max.press.drop Cont.	15 [1330]	20 [1770]	25 [2215]	24 [2124]	32 [2832]	26 [2301]	41 [3628]
	At max.press.drop Int.*	17 [1505]	23 [2035]	28 [2480]	32 [2832]	37 [3275]	33 [2920]	46 [4071]
Min. Speed***, [RPM]		10						
Static Torque of Brake, daNm [lb-in]		55 [4868]						
Min. Brake Release Pressure****, bar [PSI]		13 [190]						
Max. Opening Pressure, bar [PSI]		200 [2900]						
Weight, kg [lb]		11,0 [24.3]	11,2 [24.7]	11,4 [25.2]	11,6 [25.6]	11,7 [25.8]	12,2 [26.9]	12,3 [27.12]

* Intermittent operation: the permissible values may occur for max. 10% of every minute.


** Peak load: the permissible values may occur for max. 1% of every minute.

*** For speeds lower than given, consult factory or your regional manager.

**** Motor-brakes must always have a drain line. The brake release pressure is the difference between the pressure in the brake release line and the pressure in the drain line


- Intermittent speed and intermittent pressure must not occur simultaneously.
- Recommended filtration is per ISO cleanliness code 18/16/13. A nominal filtration of 25 micron or better.
- Recommend using a premium quality, anti-wear type mineral based hydraulic oil HLP(DIN51524) or HM (ISO 6743/4).
If using synthetic fluids consult the factory for alternative seal materials.
- Recommended minimum oil viscosity 13 mm²/s [70 SUS] at 50°C [122°F].
- Recommended maximum system operating temperature is 82°C [180°F].
- To assure optimum motor life fill with fluid prior to loading and run at moderate load and speed for 10-15 minutes.

DIMENSIONS and MOUNTING DATA

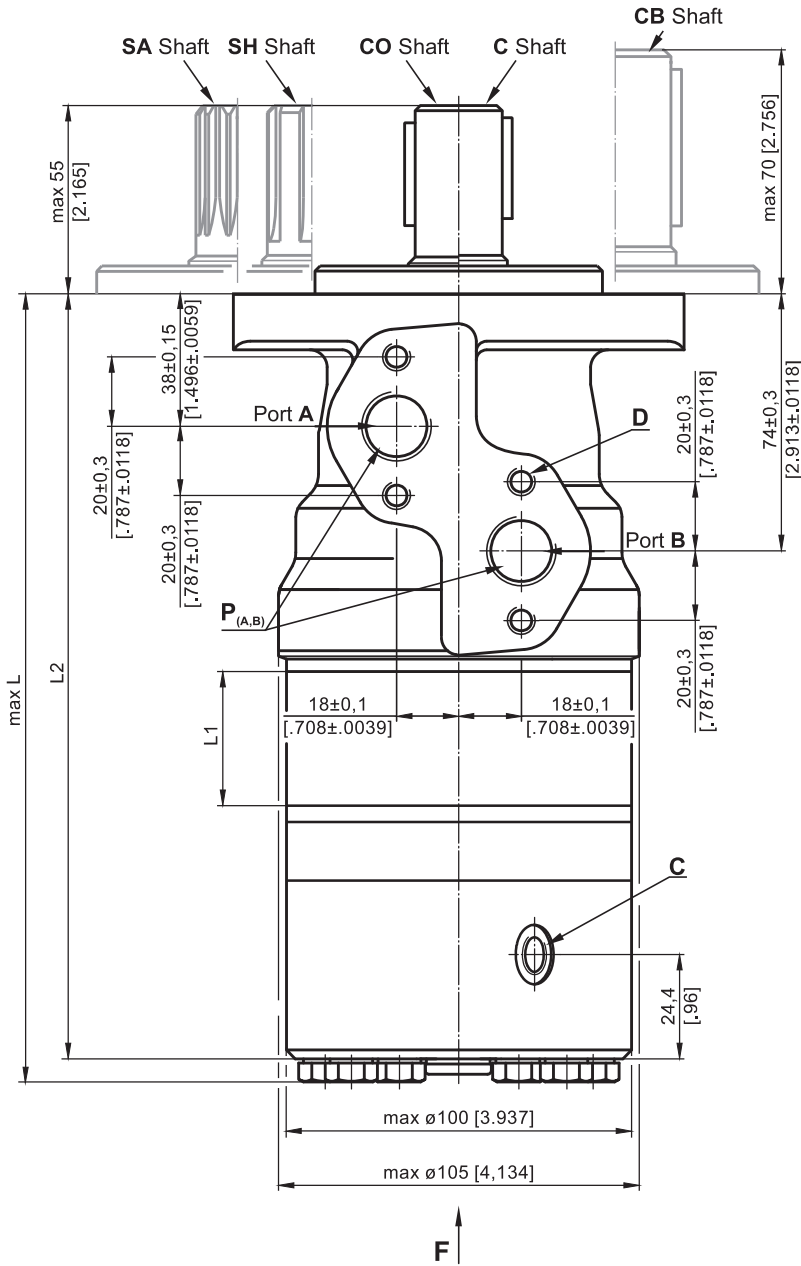

Shaft Dim.
See Page 25

Flange Dim.
See Page 24

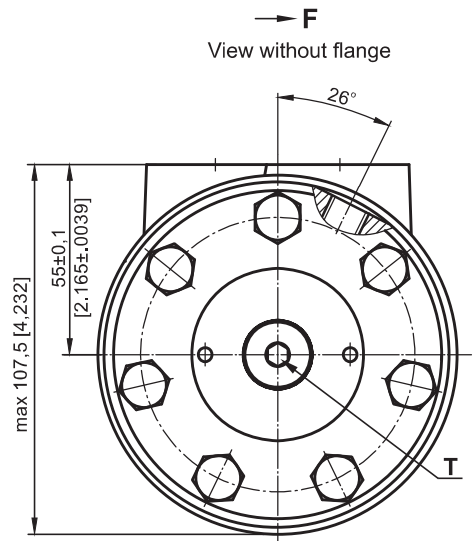

- P_(A,B)** : 2xG1/2 - 15 [.59 in] mm depth
- C** : Brake release port G1/4 - 12 [.47 in] mm depth
- T** : Drain port G1/4 - 12 [.47 in] mm depth
- D** : 4xM8 - 13 mm [.51 in] depth

Type	L ₁ , mm [in]	L ₂ , mm [in]	L, mm [in]
B/MR 80	14,0 [.55]	205,5 [8.09]	213,5 [8.41]
B/MR 100	17,4 [.69]	209,0 [8.23]	217,0 [8.54]
B/MR 125	21,8 [.86]	213,5 [8.41]	221,5 [8.72]
B/MR 160	27,8 [1.09]	219,5 [8.64]	227,5 [8.96]
B/MR 200	34,8 [1.37]	226,5 [8.92]	234,5 [9.23]


Standard Rotation
Viewed from Shaft End
Port A Pressurized - **CW**
Port B Pressurized - **CCW**

Reverse Rotation
Viewed from Shaft End
Port A Pressurized - **CCW**
Port B Pressurized - **CW**




MOUNTING

Oval Mount (2 Holes) similar to SAE-A flange with 2 holes

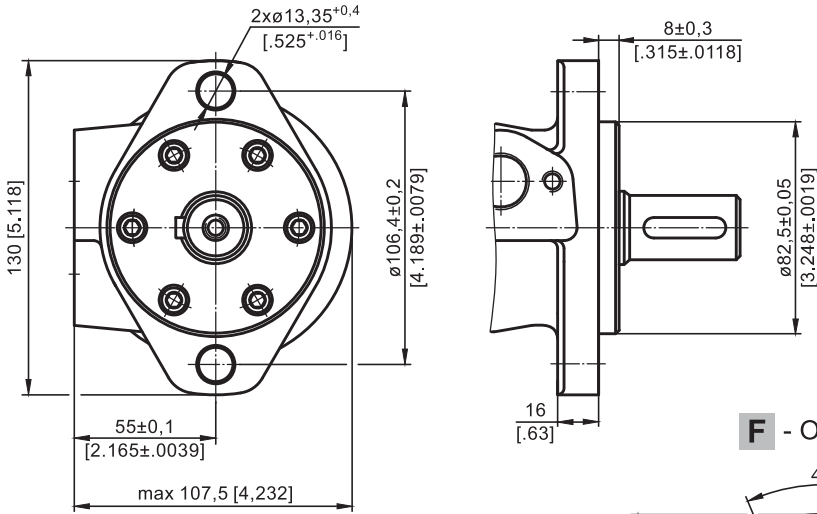


F - Oval Mount (4 Holes) similar to SAE-A flange

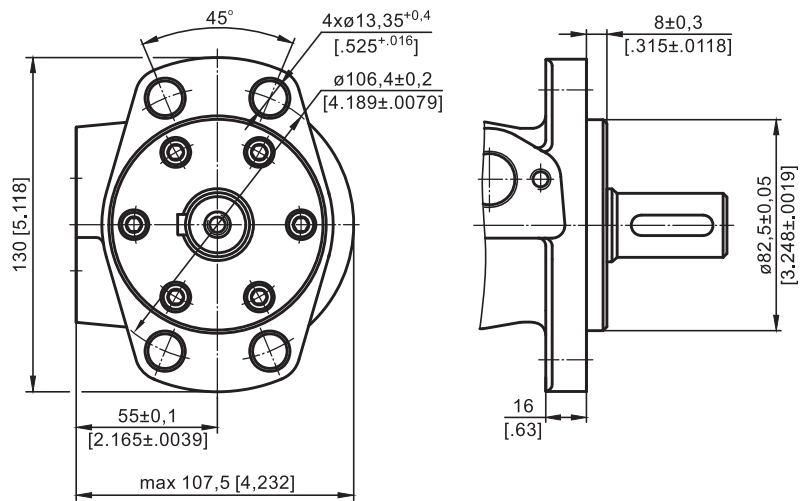

MAX. PERMISSIBLE SHAFT SEAL PRESSURE

Maximum return pressure or max. pressure in the drain line. The drain line must be always in use! The brake release pressure is the difference between the pressure in the brake release line and the pressure in the drain line.

The curves below represents allowable seal pressure at various speeds

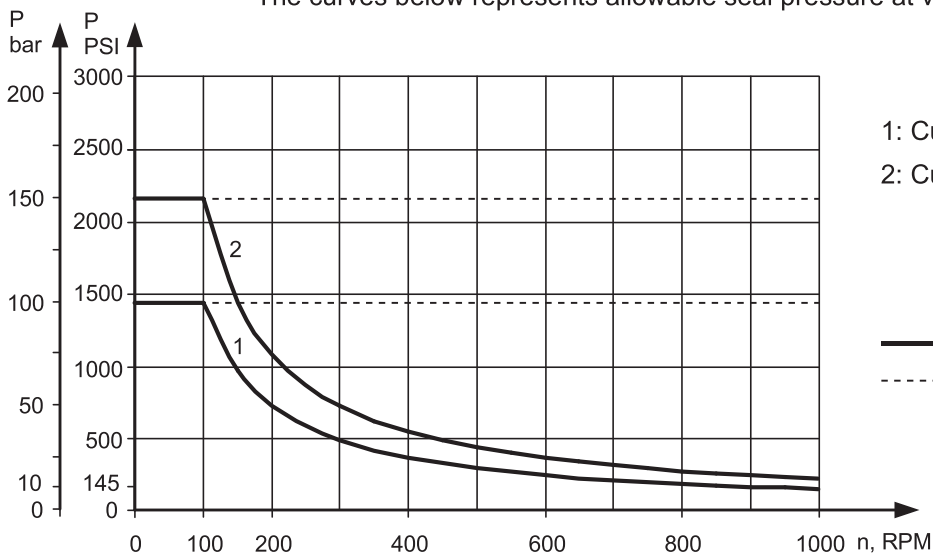


- 1: Curve for shaft type CB.
- 2: Curve for shaft type C, CO, SH and SA.

- - continuous operations
- - - - - intermittent operations


SHAFT EXTENSIONS

C, CO, SH and SA shafts
SHAFT WITH SEAL DIAMETER 28,56 mm


C - $\varnothing 25$ straight, Parallel key A8x7x32 DIN 6885
Max. Torque 34 daNm [3010 lb-in]

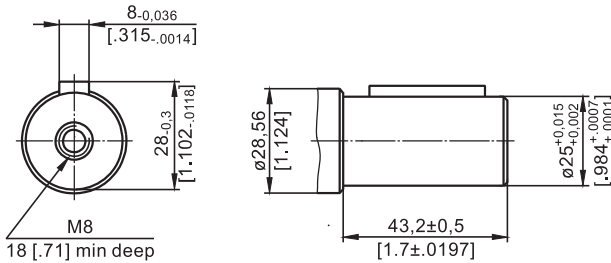


CO - $\varnothing 1$ straight, Parallel key 1/4"x1/4"x1/4" BS46
Max. Torque 34 daNm [3010 lb-in]

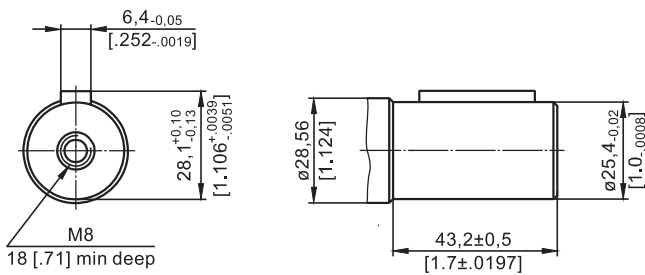

SH - splined, BS 2059 (SAE 6B)
Max. Torque 40 daNm [3540 lb-in]

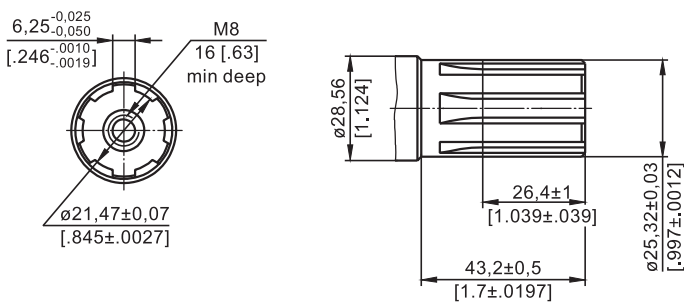


SA - splined, B25x22h9 DIN 5482
Max. Torque 40 daNm [3540 lb-in]

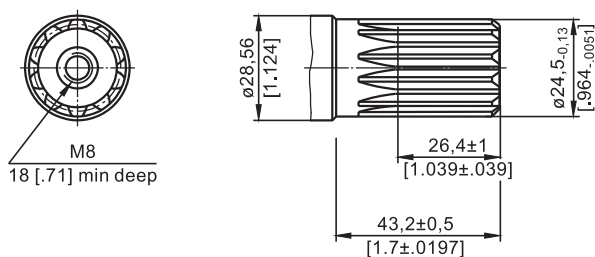

CB shaft
SHAFT WITH SEAL DIAMETER 35 mm /type ...B/

CB - $\varnothing 32$ straight, Parallel key A10x8x45 DIN 6885
Max. Torque 77 daNm [6815 lb-in]


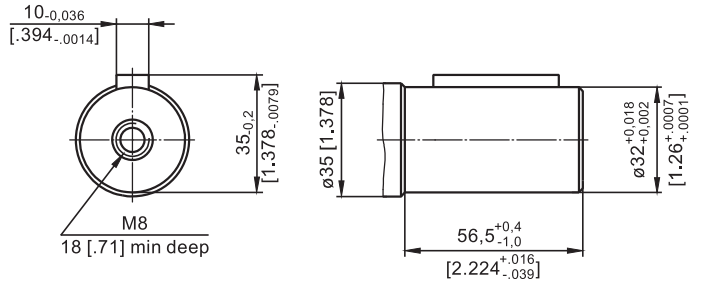


PERMISSIBLE SHAFT LOADS

The permissible radial shaft load P_{rad} depends on the speed n , RPM; distance L from the point of load to the mounting flange and shaft version.

B/MR...


Radial Shaft Load for slide dearing]

Mounting Flange		
Shaft Version	cylindrical - C, CO splined - SH, SA	cylindrical - CB
Radial Shaft Load P_{rad} , in mm	$\frac{800}{n} \times \frac{25000}{95+L}$, daN*	$\frac{800}{n} \times \frac{18750}{95+L}$, daN*
Radial Shaft Load P_{rad} , in inch	$\frac{800}{RPM} \times \frac{2215}{3.74+L}$, lbs*	$\frac{800}{RPM} \times \frac{1660}{3.74+L}$, lbs*

* $n \leq 200$ RPM; max P_{rad} =800 daN [1800 lbs]


$n \geq 200$ RPM; $L < 55$ mm [2.2 in]

Radial Shaft Load P_{rad} by $L=30$ mm [1.18 in]

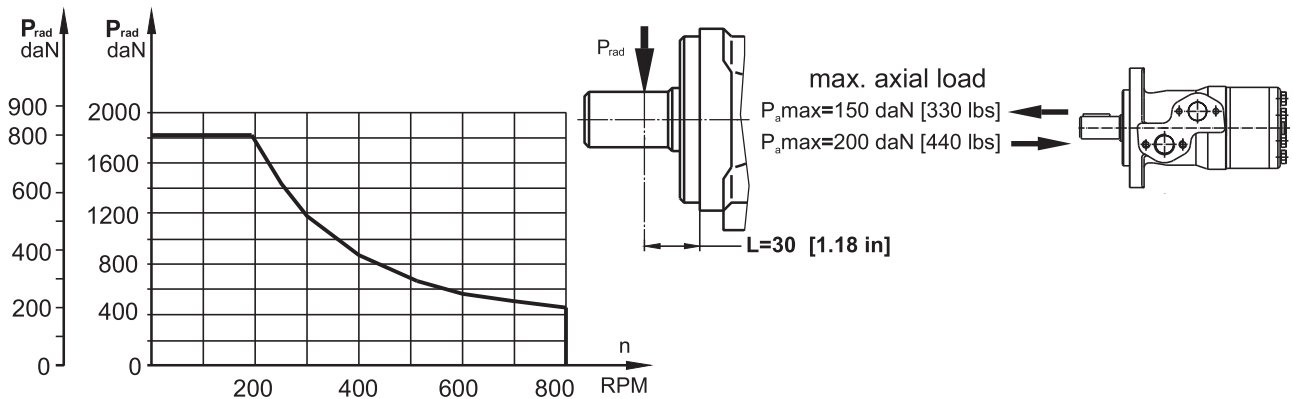

B/MR...N...

Radial Shaft Load for needle bearing **pos.2** option **N**
The curves apply to a B10 bearing life of 2000 hours.

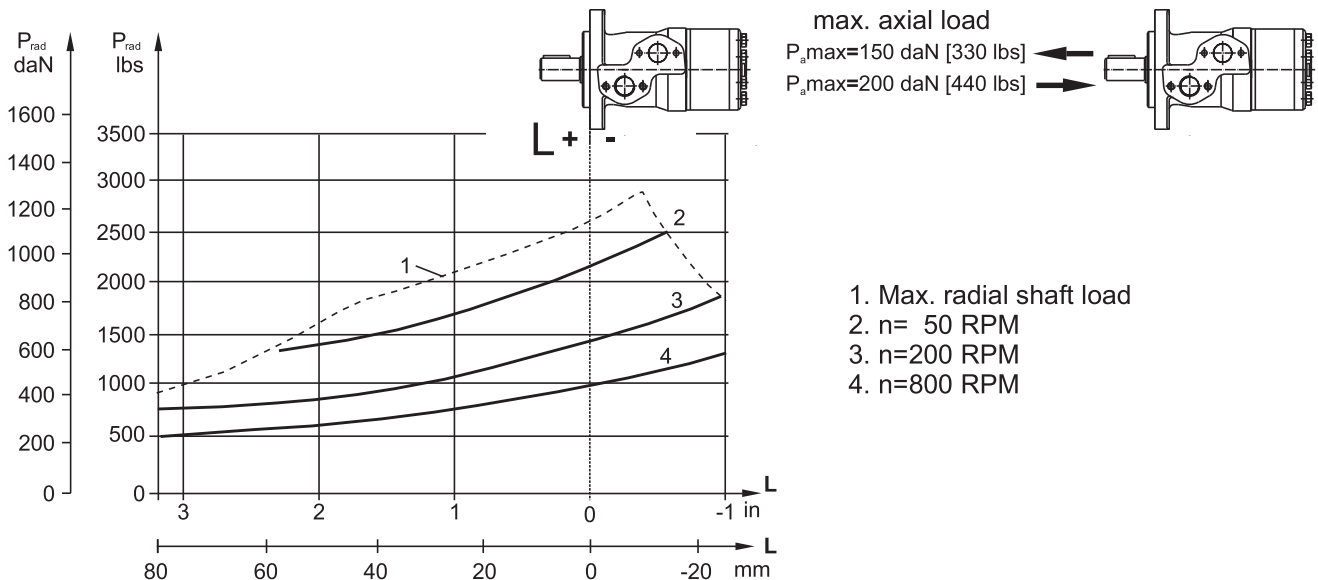

- 1. Max. radial shaft load
- 2. $n = 50$ RPM
- 3. $n = 200$ RPM
- 4. $n = 800$ RPM

ORDER CODE

	1	2	3	4	5	6	7
B/MR							

Pos.1 - Mounting Flange

omit - Oval mount, two holes

F - Oval mount, four holes

Pos.2 - Bearing Option

omit - slide bearing

N - needle bearings, only for pos.4 option C, CO, SH and SA

Pos.3 - Displacement code

80 - 80,3 cm³/rev [4.90 in³/rev]

100 - 99,8 cm³/rev [6.09 in³/rev]

125 - 125,7 cm³/rev [7.67 in³/rev]

160 - 159,6 cm³/rev [9.74 in³/rev]

200 - 199,8 cm³/rev [12.19 in³/rev]

Pos.4 - Shaft Extensions*

C - ø25 straight, Parallel key A8x7x32 DIN6885

CO - ø1" straight, Parallel key ¼"x¼"x1¼" BS46

SH - ø25,32 splined BS 2059 (SAE 6B)

SA - ø24,5 splined B25x22 DIN 5482

SHAFT WITH SEAL DIAMETER 35 mm /type ...B/

CB - ø32 straight, Parallel key A10x8x45 DIN6885

Pos.5 - Shaft Seal

omit - Shaft seal, for pressure and speed check [page 24](#)

Pos.6 - Additional Options (see [page 77](#))

Pos.7 - Design Series

omit - Factory specified

NOTES: * The permissible output torque for shafts must not be exceeded!

The following combinations are not allowed:- **N** option with "...**B**" shafts

The motor-brakes are mangano-phosphatized as standard.